




Yamaha RHINO

OEM Seat Cover Installation

Part #s 45100 & 4520X

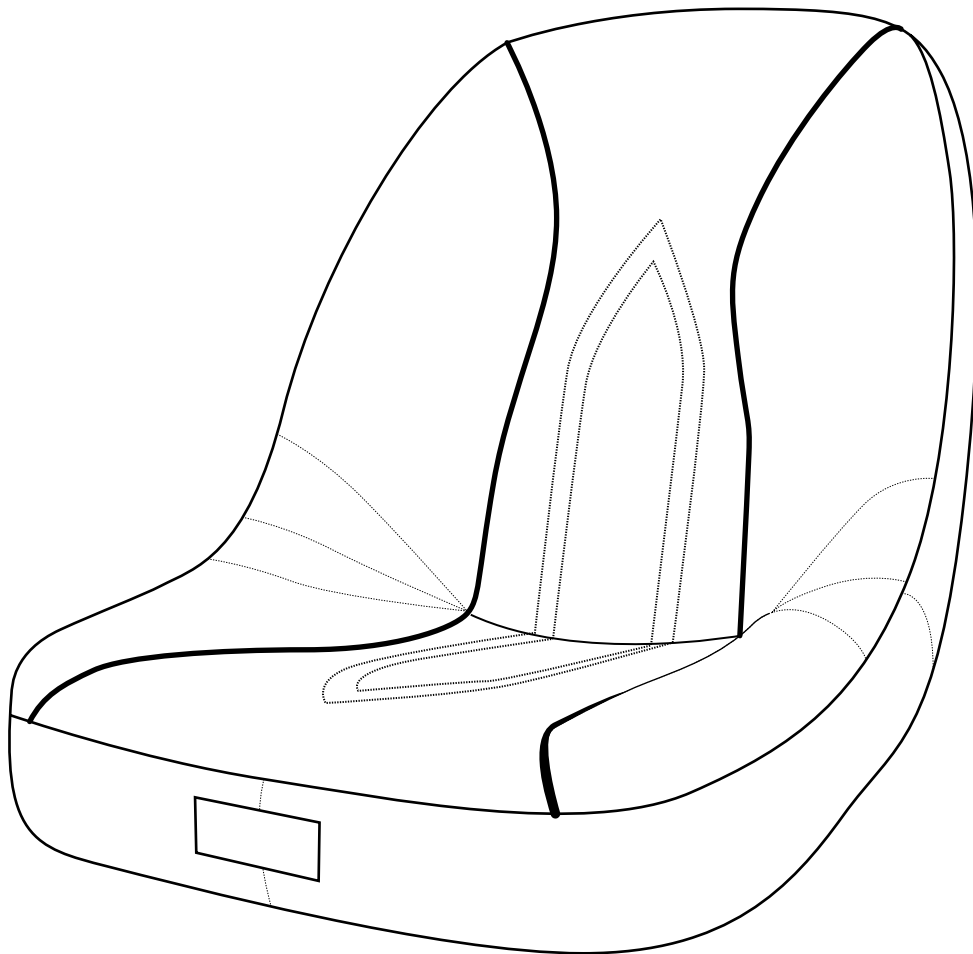

Hardware Included


• 5" - 6" wire

Tools Required


• none needed

Rhino OEM Seat Cover Installation

1.

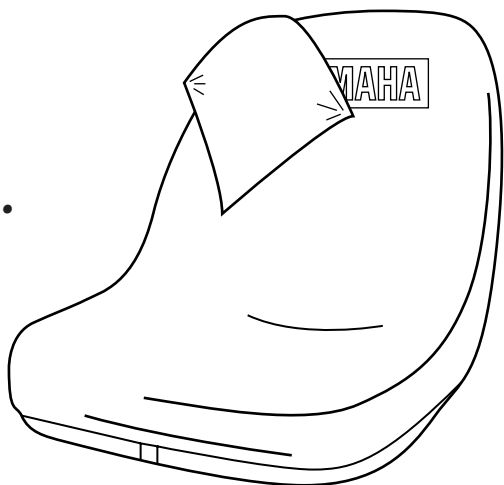


2.

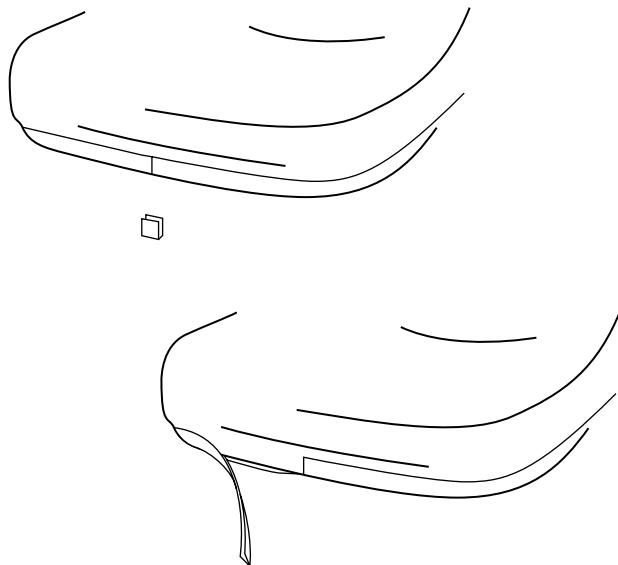

3.



4.

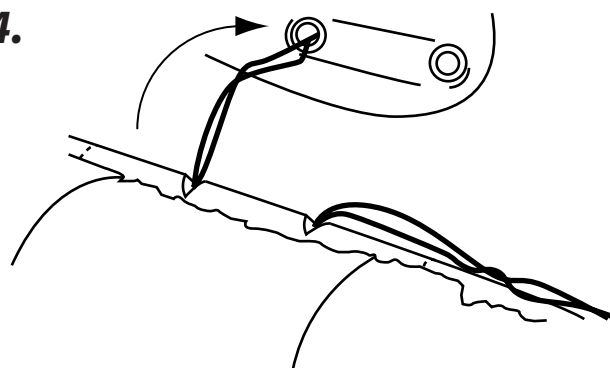

5a.



5b.



Rhino OEM Seat Cover Installation

5c.



5d.



5e.



5f.



5g.



5h.



Rhino OEM Seat Cover Installation



- 1.** Clean seat thoroughly.
- 2.** Remove clip and take off rubber strip that goes around seat.
- 3.** Fold or cut off existing flap under itself on seat.
- 4.** Take OEM Seat Cover and place strings through center holes on seat. *Make sure OEM Seat Cover is facing correctly on seat (Beard icon should be facing forward on seat).*
- 5. a.** Turn seat over on it's back and tie a loose knot (where strings were put through), so that the OEM Seat Cover cannot come off of the seat.
- 5. b.** Position seat upright with corners folded up on OEM Seat Cover.
- 5. c.** Fold edges down on seat cover.
- 5. d. - e.** Pinching bottom part of seat cover, fold under till you feel a snap (cover clip snapping into seat lip).
- 5. f. - g.** Secure by snapping all around initial area that you started at.
- 5. h.** Flip seat over on it's back and continue snapping cover in place. *Make sure to do the top and bottom of seat first, then do the sides.*
- 6. a.** With seat still turned on it's back, undo the loose knot and use provided wire to pull cover tight against seat and then tying a tight knot in each string (2 total).
- 6. b.** Cut off excess string.